

## Declaration for Capability curve

We : SOLAX POWER NETWORK TECHNOLOGY (ZHEJIANG) CO.,LTD.

Hereby confirm that:


The capability curve for following Solax product:

SolaX Product Series	Model
X3-Aelio	X3-AELIO-49.9K
	X3-AELIO-49.9K-P
	X3-AELIO-50K
	X3-AELIO-60K
	X3-AELIO-61K

in accordance with CEI-021:

$\cos\varphi: 0.9 \rightarrow P_{out} \leq 11.08 \text{ KW}$  (triangular)

$Q/P_n\% = 48.43\% \rightarrow P_{out} > 11.08 \text{ KW}$  (rectangular)

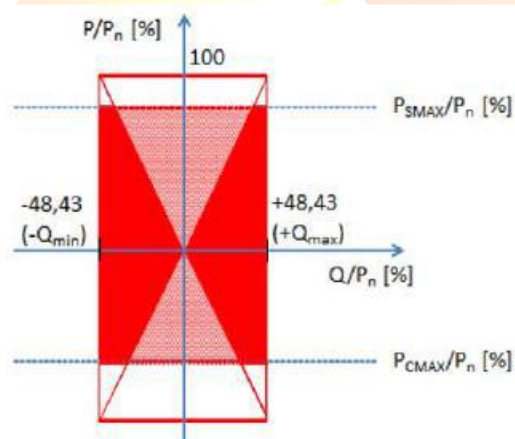

■ Capability "rettangolare"

Per ogni  $P = P_n$ ;  $|Q| = 0,4843 P_n$

■ Capability "triangolare"

Per ogni  $P = P_n$ ;  $|Q| = 0,4843 P$



POWER

# SolaX Power Network Technology (Zhejiang) CO.,Ltd.


Address Room 206, Western Area, A Building, Zhejiang University Science and Technology Park, No. 525, Xixi Rd, Hangzhou, Zhejiang, China, 310007  
Tel +86-571-56260008  
Fax +86-571-56075753  
Web [www.solaxpower.com](http://www.solaxpower.com)  
Email [info@solaxpower.com](mailto:info@solaxpower.com)




in accordance with CEI-016:

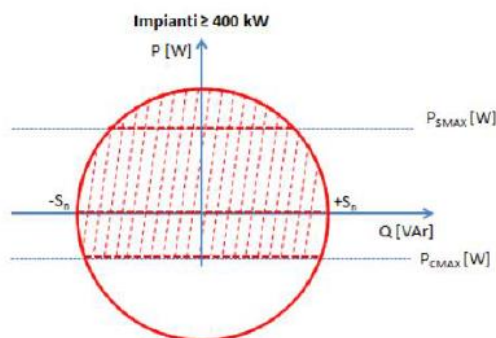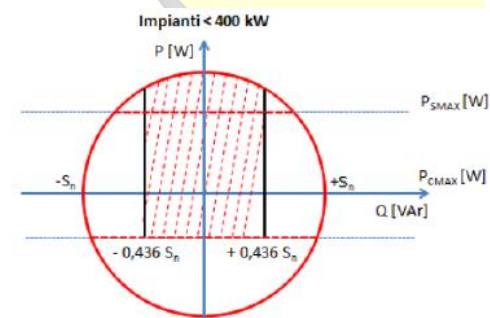

Not integrated EESS refer to below P-Q Diagram



Integrated EESS capability is made by contribute of the battery and the static converter.

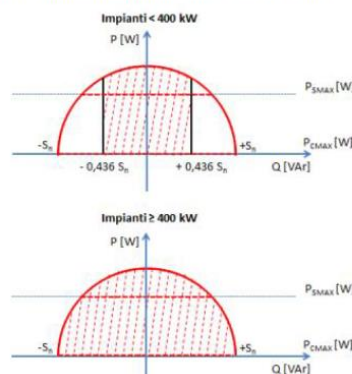

We're entirely available for any doubt or additional information regarding to this subject.

Manufacturer Stamp

浙江艾罗网络能源技术股份有限公司  
SOLAX POWER NETWORK TECHNOLOGY (ZHEJIANG) CO., LTD.

Guo Hua Wei

POWER